



## 010511.3L02.122

## VOLICA 2.0 DIRECT-INDIRECT LED 1206 DALI 4600lm 4000K microprismatic diffuser (MPRM) IP20 white

Linear luminaire, powder-coated aluminium profile equipped with an efficient direct-indirect light system, optimised for indoor use.

## TECHNICAL DATA

**Mounting:** suspended, on wire suspension (on request)

**Body:** aluminum profile

**Colour:** white

**RAL:** 9003

**Surface finish:** matt/satin

**Length [mm]:** 1206

**Operating temperature range [°C]:** 0 ... +35

## ELECTRICAL DATA

**Power:** 220-240V 50/60Hz

**Includes light source:** yes

**Output current [mA]:** 900

**Type of equipment:** DALI

**Power supply output with safety extra-low voltage SELV:** No

**Light source / lamp:** LED

**Electrical connection:** luminaire equipped with 5x1,5 mm<sup>2</sup> wire with a length of 1.7 m (I class)

**Maximum number of luminaires in the circuit with a 10A fuse (B):** 14

**Maximum number of luminaires in the circuit with a 16A fuse (B):** 23

## OPTICAL DATA

**Light distribution:** omnidirectional

**Way of lighting:** direct-indirect

**Type of optic:** diffuser

**Reflector:** white

**Diffuser:** microprismatic diffuser (MPRM)

**CRI/Ra:** >80

**Lumen luminaire [lm]:** 4600

**Colour**

**temperature [K]:** 4000

**UGR:** <19

**ULOR / DLOR:** 25/75

## GENERAL DATA

**Lifetime (L80B10):** 100 000 h

**Lifetime (L90B10):** 50 000 h

**Warranty:** 5 years

**Application:** offices, galleries, museums, reception desks

## CERTIFICATES, COMPLIANCES

**Energy class:** A++



Code	Length [mm]	Colour	Type of equipment	Luminaire power [W]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra	UGR	ULOR / DLOR	Operating temperature range [°C]
010511.3L02.122	1206	white	DALI	32	4600	144	4000	>80	<19	25/75	0 ... +35

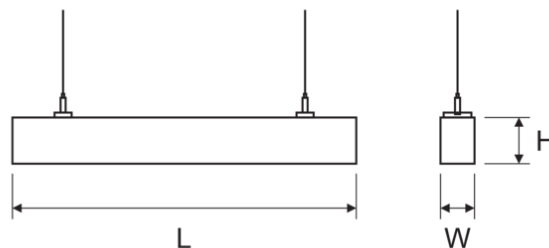
Luminous flux tolerance +/- 10%; power tolerance +/- 5%; colour temperature tolerance +/- 5%.

Up-to-date product info and General Warranty Terms available on our website [www.luglightfactory.com](http://www.luglightfactory.com)

Detailed information on luminous fluxes and powers for individual indexes are indicated on the product data sheet.

The parameters in the data sheet are given for Ta=25°C.

Code	Dimensions [mm] L W H	Pallet quantity	Net weight [kg]
010511.3L02.122	1206 60 90	120	3,4



## ACCESSORIES



150060.00062

Suspension hanger MINI

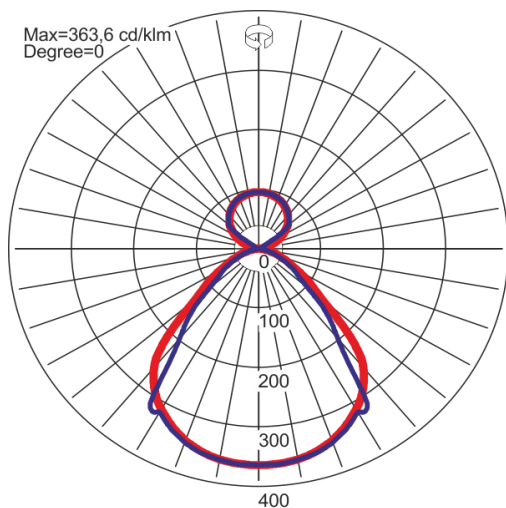

 150061.00063  
 150062.00064

Mechanical round suspension


 150061.00066  
 150062.00067

Mechanical round suspension with supply connector

## LIGHT BEAM CURVES



## WAY OF LIGHTING

